


» **Rapid** **Rapid**

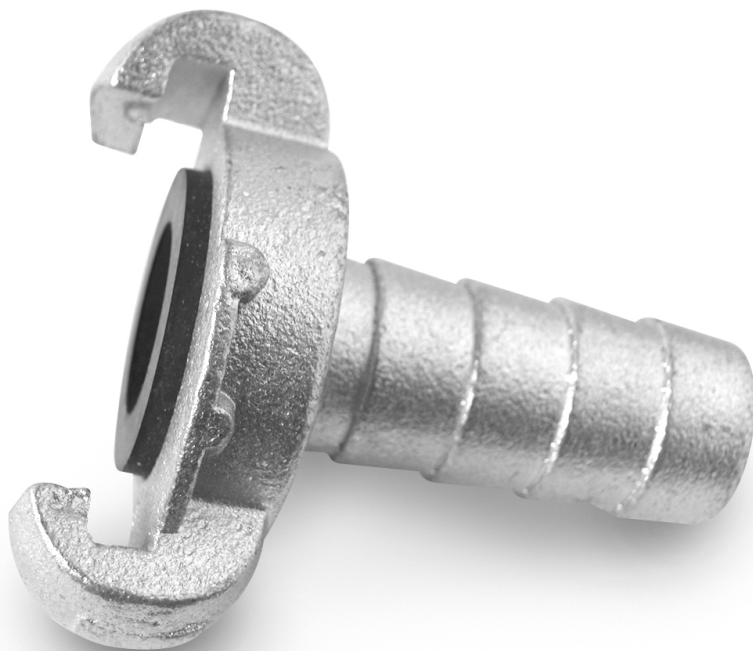

ivg **ivg colbachini spa**
■■■■■■■■ ■■ **ivg** **GROUP** ■■■■■■■■
INDUSTRIAL RUBBER HOSE

WWW.IVGSPA.IT

Rapid

Rapid

È utilizzato principalmente per trasferire acqua e aria compressa. La pressione di esercizio raccomandata è 10 bar, mentre la temperatura consigliata è ambiente e non superiore a 60°C. Il raccordo è intercambiabile solo con i raccordi Rapid. Distanza tra le griffe 42 mm.

It is mainly used for the transfer of water and compressed air. The recommended working pressure is 10 bar, while the recommended temperature is ambient and not higher than 60°C. It is interchangeable only with Rapid fittings. Claw distance 42 mm.

Materiali Materials

ghisa
cast iron

Dimensioni Size


da 3/8" a 1" con codolo - da 1/4" a 1"1/4 filettati
from 3/8" to 1" w/insert - from 1/4" to 1"1/4 threaded

Filettatura Thread


BSP/EN ISO 228-1

Guarnizione Gasket

NBR

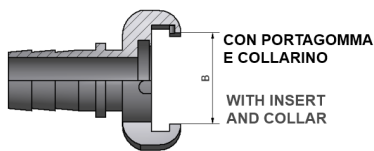

DN	B
1/2"	42 mm
5/8"	42 mm
3/4"	42 mm
1"	42 mm

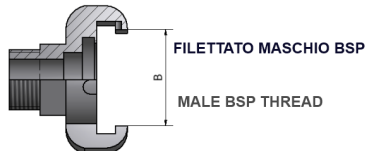

DN	B
1/4"	42 mm
3/8"	42 mm
1/2"	42 mm
3/4"	42 mm
1"	42 mm
1"1/4	42 mm



DN	B
1/4"	42 mm
3/8"	42 mm
1/2"	42 mm
3/4"	42 mm
1"	42 mm
1"1/4	42 mm

Tubi consigliati Recommended hose

Air - Water 10

Tubo estruso per aria e acqua

Air - Water 20

Tubo estruso per aria e acqua

Montana 20

Tubo per aria compressa

Montreal 10

Tubo per mandata acqua

Montreal 20

Tubo per mandata acqua.

● **Rapid** *Rapid*



Semiraccordo con codolo e collarino

Fitting with insert and collar

Codice Code	Materiale Material	Diam. raccordo ID coupling	B
3000016	ghisa-cast iron	1/2"	42 mm
3000017	ghisa-cast iron	5/8"	42 mm
3000018	ghisa-cast iron	3/4"	42 mm
3000019	ghisa-cast iron	1"	42 mm



Semiraccordo con codolo senza collarino

Fitting with insert without collar

Codice Code	Materiale Material	Diam. raccordo ID coupling	B
2204673	ghisa-cast iron	3/8"	42 mm
2204720	ghisa-cast iron	1/2"	42 mm
2204738	ghisa-cast iron	3/4"	42 mm
2204746	ghisa-cast iron	1"	42 mm



Semiraccordo filettato maschio BSP

Fitting male BSP thread

Codice Code	Materiale Material	Diam. raccordo ID coupling	B
3000020	ghisa-cast iron	1/4"	42 mm
3000021	ghisa-cast iron	3/8"	42 mm
3000022	ghisa-cast iron	1/2"	42 mm
3000023	ghisa-cast iron	3/4"	42 mm
3000024	ghisa-cast iron	1"	42 mm
3000025	ghisa-cast iron	1"1/4	42 mm



Semiraccordo filettato femmina BSP

Fitting female BSP thread

Codice Code	Materiale Material	Diam. raccordo ID coupling	B
3000026	ghisa-cast iron	1/4"	42 mm
3000027	ghisa-cast iron	3/8"	42 mm
3000028	ghisa-cast iron	1/2"	42 mm
3000029	ghisa-cast iron	3/4"	42 mm
3000030	ghisa-cast iron	1"	42 mm
3000031	ghisa-cast iron	1"1/4	42 mm



Tappo

Cap

Codice Code	Materiale Material	Diam. raccordo ID coupling
3000032	ghisa-cast iron	42 mm

● **Rapid** *Rapid*



Morsetto stringitubo con griffe

Two-bolt hose clamp with gripping fingers

Codice Code	Materiale Material	Diam. raccordo ID coupling
3000033	ghisa-cast iron	22/29 mm
3000034	ghisa-cast iron	28/33 mm
3000035	ghisa-cast iron	35/42 mm
4700376	ghisa-cast iron	40/47 mm
4700384	ghisa-cast iron	48/60 mm
4700392	ghisa-cast iron	53/68 mm
4700406	ghisa-cast iron	58/76 mm
4700414	ghisa-cast iron	75/88 mm



Morsetto stringitubo senza griffe

Two-bolt hose clamp without gripping fingers

Codice Code	Materiale Material	Diam. raccordo ID coupling
3000688	ghisa-cast iron	20/29 mm
3000689	ghisa-cast iron	28/34 mm
3000690	ghisa-cast iron	32/40 mm
4700112	ghisa-cast iron	39/49 mm
4700341	ghisa-cast iron	48/60 mm
4700350	ghisa-cast iron	60/76 mm
4700368	ghisa-cast iron	77/94 mm
4700325	ghisa-cast iron	94/115 mm
4700333	ghisa-cast iron	115/145 mm



Guarnizione

Gasket

Codice Code	Materiale Material	Diam. raccordo ID coupling
3000036	NBR	42 mm