




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1225308	10	25/64	19	0,75	12	180	36	540	0,25	0,17	120	400
1224506	19	3/4	29	1,14	12	180	36	540	0,48	0,32	120	400
1225928	25	1	37,5	1,48	12	180	36	540	0,77	0,52	120	400
1224573	32	1-1/4	48	1,89	12	180	36	540	1,21	0,81	120	400
1245724	38	1-1/2	52,5	2,07	12	180	36	540	1,27	0,85	120	400

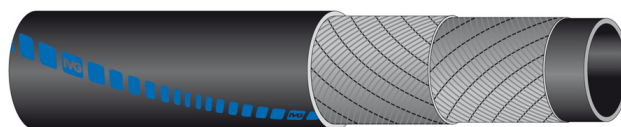

EN

Compressed air hose, with insulating rubber compound

Application: softwall compressed air hose ideal for applications where electrically isolating rubber is required, like for example electrolytic work.

Temperature: from -30°C (-22°F) to +80°C (+176°F)

Construction

Tube: black, smooth, insulating synthetic rubber.

Reinforcement: high strength synthetic cord.

Cover: black, smooth, (wrapped finish) insulating synthetic rubber, weathering and abrasion resistant.

Electrical Resistance: $\geq 1 \times 10^8 \Omega/m$.

Branding: continuous blue stripe "IVG Air (Family Logo)...".

Also available upon request: 1. Airhellas/10/X with external nomex® fabric coating, resistant to heat radiation up to 300°C (see chart) 2. Different diameters.

CN

绝缘橡胶压缩空气管

应用范围: 由绝缘橡胶制成，具有很好的电绝缘性能，可以用在具有电力的工作环境

温度范围: -30° C(-22° F) 到 +80° C(+176° F)

软管结构

内层: 黑色，光滑，绝缘合成橡胶

加强层: 高强度合成绳

外层: 黑色，光滑，绝缘合成橡胶，耐侵蚀，耐磨

电阻性: 大于 1×10^8 欧姆/米

商标: 连续蓝色条状标记 "IVG Air (公司商标)..."

可选择项: 1. Airhellas/10/X 具有 nomex® 的织构外层，耐热最高达 300° C (见图表) 2. 不同口径

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, IVG Colbachini SpA cannot guarantee the proper functioning of the product for all situations. The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills.

IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it.

These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).