




| code | inside diameter | | outside diameter | | working pressure | | burst pressure | | weight nominal | | length max | |
|---------|-----------------|-------|------------------|------|------------------|-----|----------------|-----|----------------|--------|------------|-----|
| | mm | inch | mm | inch | bar | psi | bar | psi | kg/m | lbs/ft | m | ft |
| 1401700 | 13 | 1/2 | 23 | 0,91 | 10 | 150 | 30 | 450 | 0,32 | 0,22 | 120 | 400 |
| 1402897 | 16 | 5/8 | 26 | 1,02 | 10 | 150 | 30 | 450 | 0,38 | 0,25 | 120 | 400 |
| 1401963 | 19 | 3/4 | 29 | 1,14 | 10 | 150 | 30 | 450 | 0,43 | 0,29 | 120 | 400 |
| 1400886 | 25 | 1 | 35 | 1,38 | 10 | 150 | 30 | 450 | 0,54 | 0,36 | 120 | 400 |
| 1415743 | 32 | 1-1/4 | 46,5 | 1,83 | 10 | 150 | 30 | 450 | 1,07 | 0,72 | 120 | 400 |
| 1425510 | 38 | 1-1/2 | 54 | 2,13 | 10 | 150 | 30 | 450 | 1,35 | 0,91 | 120 | 400 |
| 1401971 | 51 | 2 | 69,5 | 2,74 | 10 | 150 | 30 | 450 | 2,09 | 1,41 | 120 | 400 |

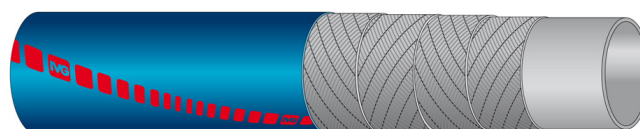

EN

Hot water (10 bar W.P. 30 bar B.P) and steam hose (6 bar W.P. 60 bar B.P.)

Application: softwall hose for delivery of hot water and steam used to wash down in dairies, slaughterhouses and in the food industry in general.

Temperature: -30°C +95°C hot water, -30°C +165°C steam.

Construction

Tube: white, smooth, synthetic rubber.

Reinforcement: high strength synthetic cord.

Cover: blue, smooth (wrapped finish), synthetic rubber, fatty food and weathering resistant.

Branding: continuous red stripe "IVG HOT (family logo)...".

Also available upon request: 1. Different diameters 2. White hose cover 3. Foodland/IIR with IIR tube in accordance to FDA title 21, item 177.2600 and BfR/XXI Cat.2 and cover in PVC/NBR, available in colours white/blue and white/white.

CN

热水(最大工作压力10bar爆破压力30bar)及蒸汽(最大工作压力6bar爆破压力60bar)冲洗管

应用范围: 软壁胶管, 适用于乳品厂、屠宰场和一般食品工业中清洗 用热水和蒸汽的输送, 耐油脂

温度范围: 热水-30° C 到 +95° C; 蒸汽-30° C 到 +165° C

软管结构

内层: 白色, 光滑, 合成橡胶

加强层: 高强度合成线绳

外层: 蓝色, 光滑, 合成橡胶, 耐油脂食物, 耐侵蚀

商标: 连续红色条状标记 "IVG HOT (公司商标)..."

可选择项: 1. 不同口径 2. 白色外层 3. Foodland/IIR 符合FDA 21, 177.2600, 及BfR/XXI Cat.2, IIR 内胶, PVC/NBR 外胶, 颜色可选白/ 蓝或白/ 白