




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1140183	19	3/4	31	1,22	40	600	120	1800	0,48	0,33	120	400
1435167	25	1	37	1,46	40	600	120	1800	0,60	0,40	120	400
1292153	32	1-1/4	44	1,73	40	600	120	1800	0,76	0,51	120	400
1434667	35	1-3/8	48	1,89	40	600	120	1800	0,89	0,60	120	400
1006860	38	1-1/2	54	2,13	40	600	120	1800	1,20	0,81	121	397
1379208	40	1-37/64	54	2,13	40	600	120	1800	1,04	0,70	120	400
1442791	51	2	67,5	2,66	40	600	120	1800	1,64	1,10	120	400
1365240	65	2-9/16	85	3,35	40	600	120	1800	2,48	1,67	120	400
1007173	76	3	98	3,86	40	600	120	1800	2,92	1,96	121	397
1007009	90	3-35/64	119,5	4,71	40	600	120	1800	4,86	3,27	122	400
1030922	100	3-15/16	128	5,04	40	600	120	1800	4,98	3,35	121	397

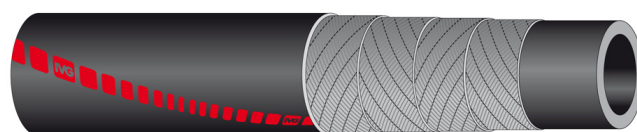

EN

Plaster hose

Standards: abrasion loss of the tube according to ISO 4649: 70 +/- 5mm³.

Application: softwall hose, used for the spraying of concrete, plaster, and gypsum.

Temperature: from -40°C (-40°F) to +70°C (+158°F).

Construction

Tube: black, smooth, antistatic SBR/NR rubber, abrasion resistant.

Reinforcement: high strength synthetic cord.

Cover: black, smooth (wrapped finish), antistatic SBR/NR rubber, abrasion resistant.

Branding: continuous red stripe "IVG Abr (family logo)...".

Also available upon request: 1. Different diameters 2. Cover in different colours 3. Different working pressures 4. Niagara LL for suction and discharge.

CN

喷涂管

质量标准: 磨耗标准符合ISO 4649: 70+/-5mm³

应用范围: 软壁软管, 用于混凝土, 水泥浆, 石膏和灰泥的喷涂

温度范围: -40° C (-40° F) 到 +70° C (+158° F)

软管结构

内层: 黑色, 光滑, 抗静电耐磨的SBR/NR 橡胶

加强层: 高强度合成线绳

外层: 黑色, 光滑 (表面布纹), 抗静电耐磨的SBR/NR 橡胶

商标: 连续红色条形标记 "IVG Abr (公司商标)..."

可选择项: 1. 不同口径 2. 不同外胶颜色 3. 不同工作压力 4. 可抽吸和输送Niagara LL

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, IVG Colbachini SpA cannot guarantee the proper functioning of the product for all situations. The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills.

IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it.

These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).