




| code | inside diameter | | outside diameter | | working pressure | | burst pressure | | weight nominal | | bending radius | | length max | |
|---------|-----------------|-------|------------------|------|------------------|-----|----------------|-----|----------------|--------|----------------|------|------------|-----|
| | mm | inch | mm | inch | bar | psi | bar | psi | kg/m | lbs/ft | mm | inch | m | ft |
| 1493493 | 9 | 23/64 | 16 | 0,63 | 10 | 150 | 25 | 375 | 0,21 | 0,14 | 60 | 2,4 | 80 | 262 |
| 1444816 | 11 | 13/30 | 18 | 0,71 | 10 | 150 | 25 | 375 | 0,18 | 0,12 | 70 | 2,8 | 80 | 262 |
| 1444824 | 13 | 1/2 | 25 | 0,99 | 10 | 150 | 25 | 375 | 0,41 | 0,27 | 100 | 3,9 | 60 | 200 |

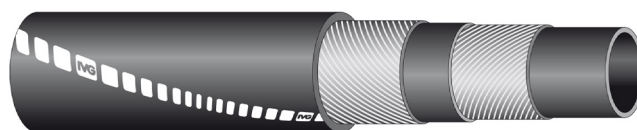

EN

Extruded hose for brake systems

Standards: DIN 74310.

Application: used as flexible joint in automotive air brake systems. Suitable for compressed air with oil traces.

Temperature: from -40°C (-40°F) to +70°C (+158°F).

Construction

Tube: black, seamless synthetic rubber compound.

Reinforcement: high strength synthetic fabrics.

Cover: black, seamless, synthetic rubber compound abrasion, ageing, ozone, and weather-resistant.

Branding: IVG AIR BRAKE DIN 74310 – SIZE - QUARTER / YEAR - BATCH PRODUCTION NUMBER.

CN

汽车刹车管

质量标准: 符合DIN 74310

应用范围: 挤出型, 汽车制动软管, 应用于汽车刹车系统中的柔性连接

温度范围: -40° C (-40° F) 到 +70° C (+158° F)

软管结构

内层: 黑色, 无缝, EPDM 橡胶

加强层: 高强度纤维编织

外层: 蓝色, 无缝, 耐磨EPDM 橡胶, 耐臭氧, 耐气候, 耐磨, 耐老化

商标: IVG AIR BRAKE DIN 74310 - 尺寸 - 生产年份/ 周次 - 批次号