




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1168193	25	1	34,5	1,36	3	45	9	135	0,65	0,44	95	3,7	120	400
1168215	32	1-1/4	41,5	1,64	3	45	9	135	0,85	0,57	125	4,9	120	400
1168240	38	1-1/2	47,5	1,87	3	45	9	135	0,98	0,66	150	5,9	120	400
1168266	51	2	61	2,40	3	45	9	135	1,35	0,91	205	8,1	120	400
1168290	63,5	2-1/2	74	2,92	3	45	9	135	1,64	1,10	275	10,8	120	400
1156942	76	3	90	3,55	3	45	9	135	2,65	1,78	335	13,2	120	400
1167928	102	4	118	4,65	3	45	9	135	4,42	2,97	475	18,7	120	400

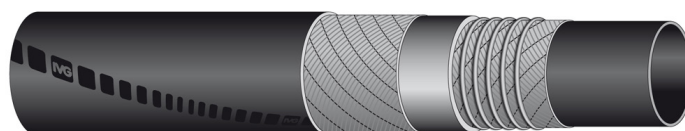

EN

Water and wet exhaust hose

Standards: SAE J 2006 R2.

Application: hardwall hose used for the suction and delivery of water and wet exhaust in pleasure boats.

Temperature: from -30°C (-22°F) to +80°C(+176°F).

Construction

Tube: black, smooth, synthetic rubber.

Reinforcement: high strength synthetic cord.

Cover: black, smooth (wrapped finish), synthetic rubber, weathering resistant.

CN

水和廢氣軟管

质量标准: SAE J 2006 R2.

应用范围: 硬壁胶管，专用于游艇吸送和排放水及湿气。

温度范围: -30° C (-22° F) 到 +80° C(+176° F)

软管结构

内层: 黑色，光滑合成橡胶。

加强层: 高强度合成线及螺旋钢丝加强。

外层: 黑色，光滑（表面布纹），合成橡胶，耐老化。