




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1355554	51	2	61	2,40	3	45	9	135	1,16	0,78	165	6,5	60	200
1355546	63,5	2-1/2	74	2,92	3	45	9	135	1,47	0,99	215	8,5	60	200
1299301	76	3	86,5	3,41	3	45	9	135	1,73	1,16	270	10,6	60	200
1336657	102	4	114	4,49	3	45	9	135	2,80	1,88	385	15,2	60	200

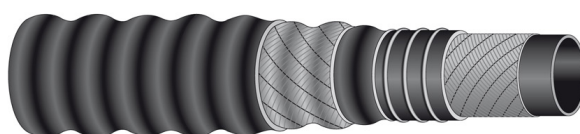

EN

Water and wet exhaust hose

Standards: SAE J 2006 R2.

Application: hardwall, semi-corrugated hose used to convey water and wet exhaust in pleasure boats.

Temperature: from -30°C (-22°F) to +80°C(+176°F).

Construction

Tube: black, smooth, synthetic rubber, steel helix wire.

Reinforcement: high strength synthetic cord.

Cover: black, semi-corrugated (wrapped finish), synthetic rubber, weathering resistant.

CN

水和廢氣軟管

質量標準: SAE J 2006 R2

應用範圍: 硬壁半波紋膠管，專用於游艇吸送和排放水及濕氣。

溫度範圍: -30° C (-22° F) 到 +80° C(+176° F)

軟管結構

內層: 黑色，光滑，合成橡膠。

加強層: 高強度合成線及螺旋鋼絲加強。

外層: 黑色，半波紋（表面布紋），合成橡膠，耐老化。