




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1150685	76	3	94	3,70	6	90	18	270	2,84	1,91	60	200
1392050	90	3-35/64	103	4,06	6	90	18	270	2,30	1,55	60	200
1405926	102	4	112	4,41	6	90	18	270	1,94	1,30	60	200
1382624	102	4	120	4,73	6	90	18	270	3,82	2,56	60	200
1382829	102	4	122	4,81	6	90	18	270	4,31	2,90	60	200
1352555	110	4-21/64	123	4,85	6	90	18	270	2,80	1,88	60	200

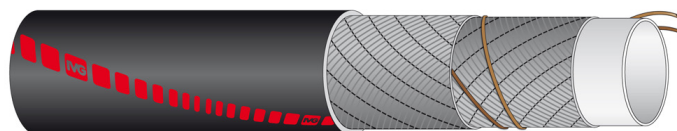

EN

Hose with white tube for delivery of dry abrasive materials

Standards: Reg. EC 1935/04 and 2023/06. Phthalates free. FDA tit.21 art.177.2600 dry foods. BfR XXI Cat.4.

Application: softwall hose with anti abrasive white tube, suitable to convey with pneumatic systems abrasive foodstuff, dust, and PVC grains that must not be stained.

Not suitable for ATEX environments.

Temperature: from -30°C (-22°F) to +70°C (+158°F).

Construction

Tube: white, smooth NR/SBR rubber, resistant to abrasive dust and foodstuff.

Reinforcement: high strength synthetic plies and embedded copper wires.

Cover: black, smooth (wrapped finish), electrically conductive EPDM rubber.

Branding: red transfer "IVG TRUCK (family logo)..."

Also available upon request: 1.Different diameters. 2.Different working pressures. 3.Don bd with EPDM blue cover.

CN

食品级干磨料输送管

质量标准: 符合FDA tit.21 干性食品 . BfR Kat.4 Reg. EU CE 1935/04 , 2023/06

应用范围: 软壁胶管, 食品级耐磨的白色内胶, 适用于气动系统中的磨料食料, 粉尘和不允许染色的PVC颗粒。不适合防爆环境

温度范围: -30° C (-22° F) 到 +70° C (+158° F)

软管结构

内层: 白色, 光滑NR/SBR橡胶, 耐粉尘和食料磨损

加强层: 高强度合成纤维层, 内嵌铜导线线

外层: 黑色, 光滑, 导电性EPDM橡胶

商标: 红色条形标记 "IVG Truck (公司商标)..."

可选择项: 1. 不同尺寸直径 2. 各种工作压力 3. Don bd, 具有EPDM的蓝色外层