




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1375792	19	3/4	27	1,06	3	45	9	135	0,34	0,23	120	400
1276085	20	25/32	26	1,02	3	45	9	135	0,27	0,18	120	400
1178458	25	1	32	1,26	3	45	9	135	0,38	0,26	120	400
1201778	28	1-7/64	36	1,42	3	45	9	135	0,47	0,32	120	400
1181777	32	1-1/4	40	1,58	3	45	9	135	0,53	0,36	120	400
1193627	38	1-1/2	46	1,81	3	45	9	135	0,62	0,42	120	400
1182072	45	1-49/64	54	2,13	3	45	9	135	0,84	0,56	120	400
1201824	51	2	61	2,40	3	45	9	135	1,09	0,73	120	400
1193635	63,5	2-1/2	73,5	2,90	3	45	9	135	1,30	0,87	120	400
1192493	76	3	86	3,39	3	45	9	135	1,57	1,06	120	400
1233424	102	4	112	4,41	3	45	9	135	2,07	1,39	120	400
1193651	125	4-59/64	138	5,44	3	45	9	135	3,14	2,11	120	400
1193678	152	6	166	6,54	3	45	9	135	4,23	2,84	120	400

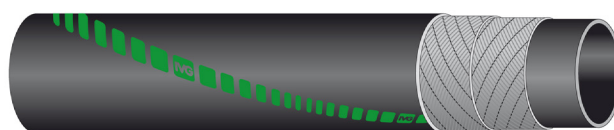

EN

Radiator hose

Application: softwall hose for conveying hot water mixed with anti-freeze liquids in cooling systems.

Temperature: from -40°C (-40°F) to +100°C (+212°F).

Construction

Tube: black, smooth, heat resistant synthetic rubber.

Reinforcement: high strength synthetic cord.

Cover: black, smooth (wrapped finish), heat and ageing resistant synthetic rubber.

Branding: continuous green stripe "IVG Auto (family logo)...".

Also available upon request: 1. York in PVC/NBR rubber, for better resistance to oils. Temperature from -30°C (-22°F) to +100°C (+212°F)
 2. Different diameters.

CN

散热管

应用范围: 软壁胶管, 用于在冷却系统中传输热水和防冻液

温度范围: -40° C (-40° F) 到 +100° C (+212° F)

软管结构

内层: 黑色, 光滑, 耐热合成橡胶

加强层: 高强度合成线绳

外层: 黑色, 光滑, 合成橡胶, 耐热, 耐老化

商标: 连续绿色条状标记 "IVG Auto (公司商标)..."

可选择项: 1. PVC/NBR 橡胶, 更好的耐油性, 温度范围 -30° C 到 +100° C 2. 不同口径

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, IVG Colbachini SpA cannot guarantee the proper functioning of the product for all situations. The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills.

IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it.

These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).